


## MOVETRONIC PVC - 0,14mm<sup>2</sup> to 0,34mm<sup>2</sup>/PVC/unshielded

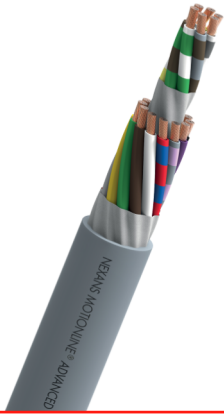

### CONTACT

Market information  
[industryprojects.business@lynxgroup.com](mailto:industryprojects.business@lynxgroup.com)

Data and signal transmission cables for dynamic application, PVC jacket, unshielded, oil resistant, flame retardant, UL and CSA approved

### STANDARDS

**Product** UL and CSA approval

Cables designed for continuous moving application, high flexible, oil resistance.

#### Applications:

- Tracksystems for tool machines
- Wood machines
- Automatic lines for assembly
- Handling
- Packaging
- Other applications with moderate stresses



Operating temp.  
-5 ... 80 °C



Storage temperature, range  
-40 ... 80 °C



Flame retardant  
IEC/EN 60332-1-2; FT1; UL 1581 FT1



Oil resistance  
EN 50363-4-1

**CHARACTERISTICS****Construction characteristics**

Construction type	-
Conductor material	Bare copper
Insulation	Polyolefin
Insulation colour	DIN 47100
Taping	Non woven tape
Outer sheath	PVC
Sheath colour	Grey RAL 7001

**Dimensional characteristics**

Conductor cross-section	- mm <sup>2</sup>
Number of cores	-
Outer Diameter	- mm
Copper content	- kg/km
Approximate weight	- kg/km

**Electrical characteristics**

Rated Voltage U <sub>0</sub> /U	300 V
Test voltage	1500 V

**Mechanical characteristics**

Bending cycles	5 Mio.
Speed	300 m/min
Maximum acceleration	20 m/s <sup>2</sup>

**Usage characteristics**

Field of application	Dynamic
Operating temperature, range	-5 ... 80 °C
Storage temperature, range	-40 ... 80 °C
Minimum dynamic operating bending radius	6.5 (xD)
Flame retardant	IEC/EN 60332-1-2; FT1; UL 1581 FT1
Oil resistance	EN 50363-4-1